




"SF" SERIES SOLAR FLASHINGS

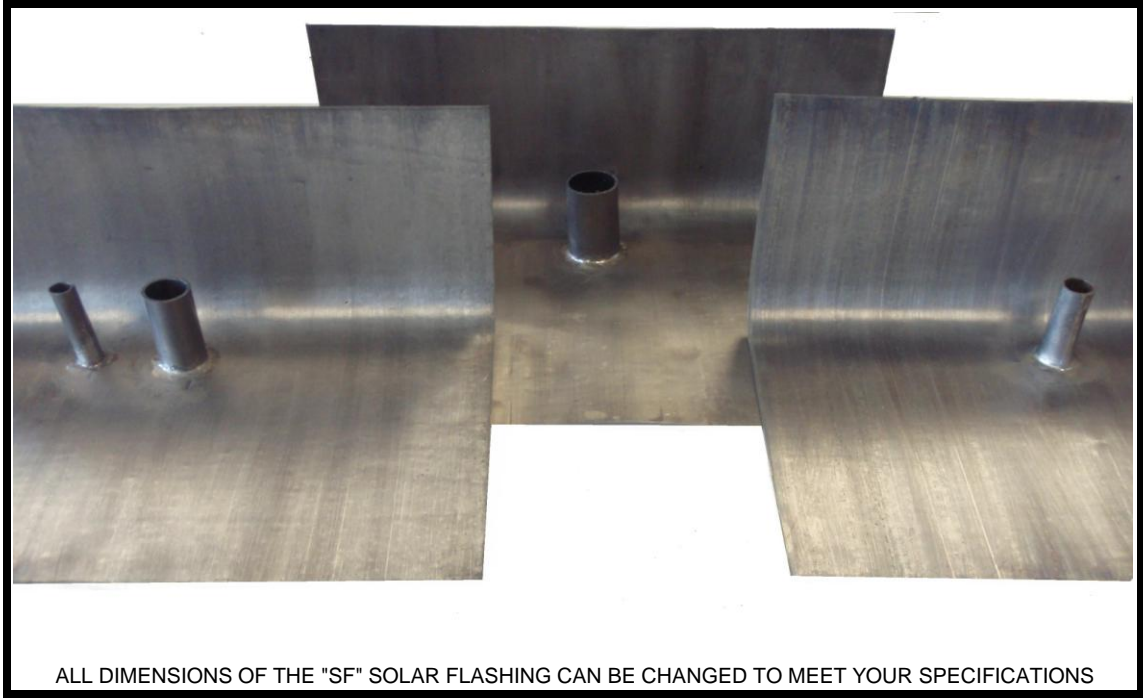

CONSTRUCTION CHARACTERISTICS OF THE "SF" SERIES SOLAR FLASHING

SANTA ROSA LEAD PRODUCTS (SRLP) MANUFACTURES AN ALL-LEAD FLASHING FABRICATED FROM PURE LEAD THAT MEETS **ASTM B749 COPPER BEARING** AND FEDERAL SPECIFICATION **QQ-L-201f**. THE STANDARD FLASHING CONSISTS OF A **CYLINDRICAL (TUBE) RISER** WHERE A STEEL-REINFORCED BOOT IS NOT REQUIRED.

STANDARD SOLAR FLASHINGS ARE AVAILABLE IN **2.5# LEAD** ON A **12"x12" BASE** WITH A **2"-TALL RISER**. SOME MODELS OF THE "SF" SERIES SOLAR FLASHINGS ALSO HAVE AN EXTRA **3/8" I.D.** RISER TO ACCOMMODATE SENSOR WIRE(S). "SF" SERIES SOLAR FLASHINGS CAN ALSO BE MADE OF **4# LEAD**, IF REQUESTED.

OTHER BASE SIZES AND RISER HEIGHTS CAN EASILY BE MANUFACTURED UPON REQUEST. "SF" SERIES SOLAR FLASHINGS CAN ALSO BE MADE PRE-CUT TO A PITCH IF REQUIRED, ALTHOUGH MOST SOLAR APPLICATIONS ARE 90-DEGREES TO THE ROOF (FLAT PITCH).

- STOCK SIZES INCLUDE (OTHER SIZES AVAILABLE UPON REQUEST):
- | | | |
|---------------------------------------------|-------------------------------------------------|-----------------------------------------------|
| 5/8" I.D. (SF5/8) | 3/4" I.D. (SF3/4) | 1.0" I.D. (SF1) |
| 1-1/4" I.D. (SF1-1/4) | 1-1/2" I.D. (SF1-1/2) | 1-3/4" I.D. (SF1-3/4) |
| 2.0" I.D. (SF2) | 3/4" I.D. x2 (SFHC2) | 3/4" I.D. w/ SENSOR WIRE (SF3/4+WIR) |
| 3/4" I.D. x2 w/ SENSOR WIRE (SFHC) | 1.0" I.D. x2 w/ SENSOR WIRE (SFD1+WIR) | |

**WHEN PROPERLY INSTALLED, THE "SF" SERIES SOLAR FLASHING
WILL LAST THE LIFE OF ANY ROOFING SYSTEM!**